



Index

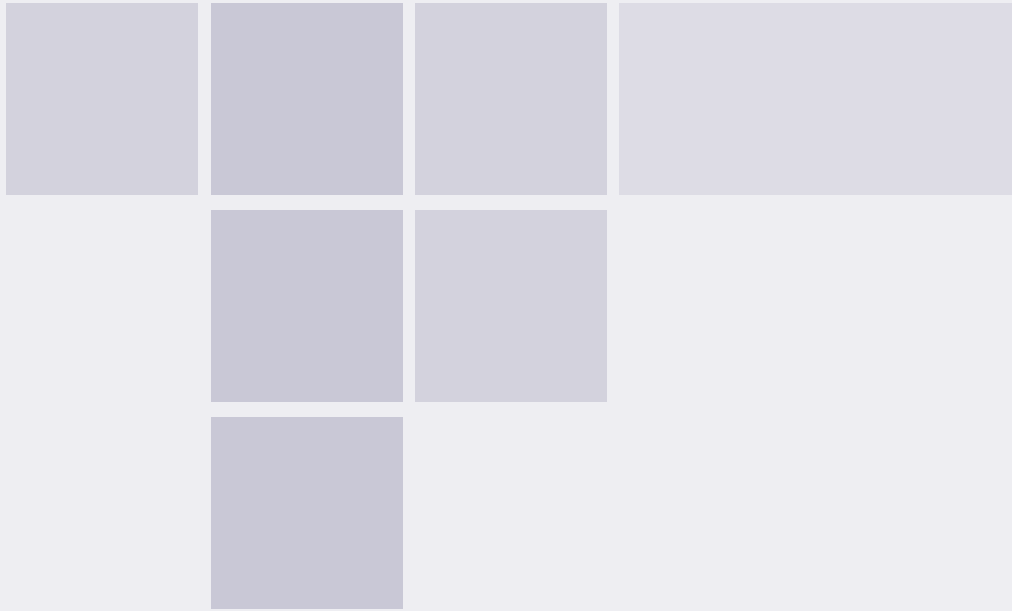

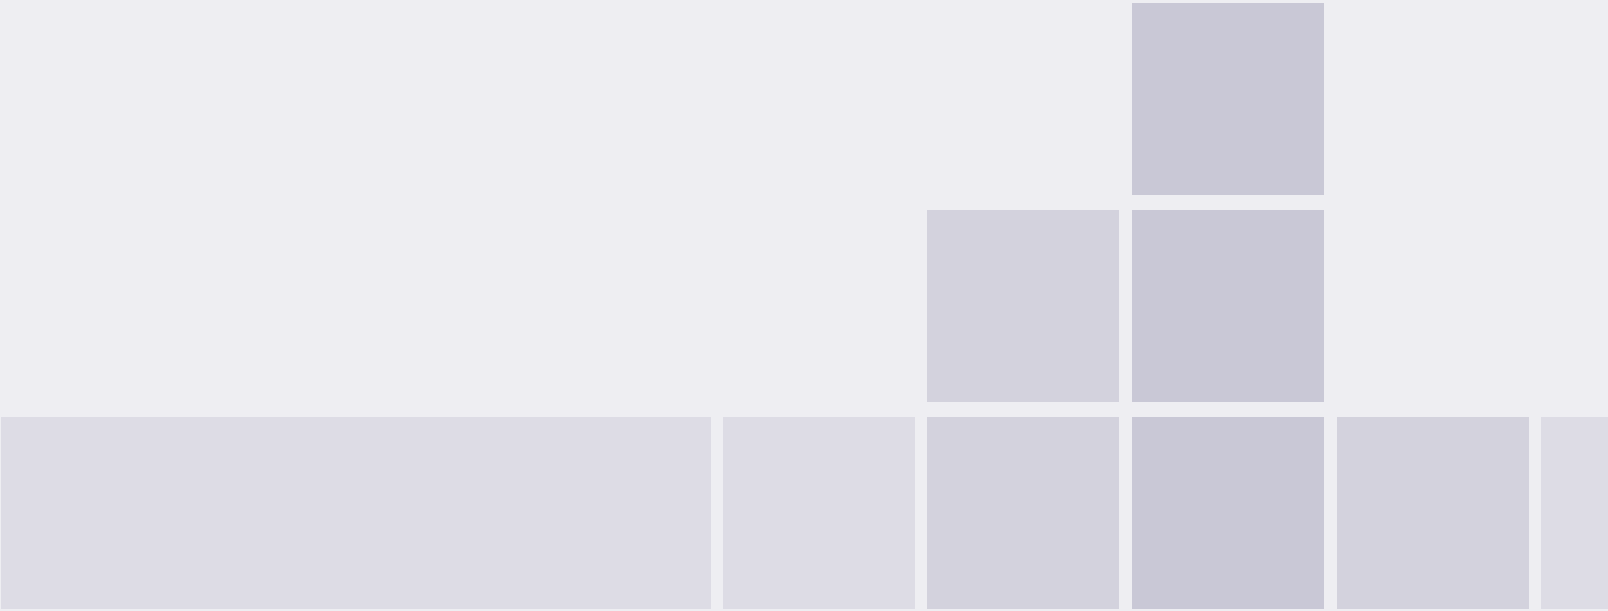

Index

Suffix Index

p. 199

Part Number Index

p. 201

Literature Order Form

p. 212

Suffixes

Quick Reference Table

Suffix	Description	Applicable Products	Special Instructions
-001	Reverse interior for PN, DSN24, DSN37 device only	PN, DSN24, DSN37	Add to inlet and receptacle part numbers
-026	Black device gasket	DS, DR, DSN	
-06B	Suffix for DR inlets & receptacles	DR	Included in inlet & receptacle part number
-080	Junction box with angle	All	
-1	1" NPT thread size for conduit entry	DSN, DS, DR, DX, PN, DN, DB	Add to applicable accessories
-112	1 1/2" NPT thread size for conduit entry	DSN, DS, DR, DX, DN, DB	Add to applicable accessories
-12	1/2" NPT thread size for conduit entry	DS, DR, DX, DN, DB	Add to applicable accessories
-114	1 1/4" NPT thread size for conduit entry	DSN, DS, DR, DX, PN, DN, DXN, DB	Add to applicable accessories
-12N	Suffix for DR inlets & receptacles	DR	Included in inlet & receptacle part number
-142	Recess plate for receptacle	DS3, DS6, DR50, DR100, DS100C, PN	
-17B	Suffix for DR inlets & receptacles	DR	Included in inlet & receptacle part number
-172	Two auxiliary pilot contacts	DS2, DS9, DB3, DB6	Add to inlet or receptacle part number
-173	Three auxiliary pilot contacts	DS2, DS9	Add to inlet or receptacle part number
-174	Four auxiliary pilot contacts	DS2, DS9, DB9	Add to inlet or receptacle part number
-175	Five auxiliary pilot contacts	DS2, DS9	Add to inlet or receptacle part number
-180	180° lid opening for flush mounted inlets	DS, DR, DXN	Add to the receptacle part number
-185	High temp product	PN	Add to inlet or receptacle part number
-2	2" NPT thread size for conduit entry	DS, DR, DX, DN, DB	Add to applicable accessories
-200	Cable range for PF/PFQ Handle 2.000" - 2.125"	PF/PFQ	Add to the handle part number
-20	2" NPT fitting size	PF/PFQ	Add to PF/PFQ junction box
-20P	Cable range .28" - .41"	DXN1, DXN3	Add to plug/connector part number
-212	2 1/2" NPT thread size for conduit entry	DS, DR, DN	
-21R	Suffix for DR inlets & receptacles	DR	Included in inlet & receptacle part number
-225	Cable range for PF/PFQ Handle 2.125" - 2.375"	PF/PFQ	Add to the handle part number
-226	Spring loaded cap for inlet	DS	Add to the inlet part number
-237	Cable range for PF/PFQ Handle 2.25" - 2.375"	PF/PFQ	Add to the handle part number
-24R	Suffix for DR inlets & receptacles	DR	Included in inlet & receptacle part number
-25	2 1/2" NPT fitting size	PF/PFQ	Add to PF/PFQ junction box
-25P	Cable range .35" - .67"	DXN	Add to plug/connector part number
-250	Cable range for PF/PFQ Handle 2.375" - 2.5"	PF/PFQ	Add to the handle part number
-263	Three auxiliary pilot contacts	DS6, DS100C	
-270	Auxiliary switch for female devices	DS, DSN, DR	Add to receptacle part number
-275	Cable range for PF/PFQ Handle 2.5" - 2.75"	PF/PFQ	Add to the handle part number
-30	3" NPT fitting size	PF/PFQ	Add to PF/PFQ junction box
-300	Cable range for PF/PFQ Handle 2.75" - 3"	PF/PFQ	Add to the handle part number
-30A	30A capacity for PN devices	PN	Add to inlet & receptacle part numbers
-312	Cable range for PF/PFQ Handle 3" - 3.125"	PF/PFQ	Add to the handle part number
-32P	Cable range .43" - .83"	DXN	Add to plug/connector part number

Suffix	Description	Applicable Products	Special Instructions
-335	Cable range for PF/PFQ Handle 3.125" - 3.35"	PF/PFQ	Add to the handle part number
-338	PRL release pawl	DS, DSN, DR	Add to inlet part number
-338-A188	PRL release pawl with straight insertion (for inlets)	DS, DN, DSN, DR	Add to inlet part number
-34	3/4" NPT thread size for conduit entry	DSN, DS, DR, DX, PN, DN, DXN, DB	Add to applicable accessories
-345-A188	SRL release pawl with straight insertion for receptacles	DSN	Add to receptacle part number
-348-A188	SRL release pawl with straight insertion for receptacles	DS, DN, DR	Add to receptacle part number
-35	3 1/2" NPT fitting size	PF/PFQ	Add to PF/PFQ junction box
-350	Cable range for PF/PFQ Handle 3.35" - 3.5"	PF/PFQ	Add to the handle part number
-375	Emergency stop pawl	DS, DSN, DXN, DR	Add to receptacle part number
-3NF	Non functioning contact to activate auxiliary switch	DS, DSN	Activates 2 Pole 4 wire receptacle.
-40	4 1/2" NPT fitting size	PF/PFQ	Add to PF/PFQ junction box
-40P	Cable range .75" - 1.10"	DXN	Add to plug/connector part number
-473	Finger drawplate on handle	DS	Add to handle part number
-48	Inlet without cap	PF, DB	Add to the inlet part number
-601	Special adapter plate for DSN1 angle on junction box	DSN1	
-824	Metal pawl for poly receptacles	DS, DR	
-824-300	Locking pawls	PN	Add to the receptacle part number
-843	Padlock pawl	DS, DSN	Add to receptacle part number
-845	Oversize padlock pawl	DS	Add to receptacle part number
-972	Two auxiliary pilot contacts	DS1, DS3, DS6, DSN3, DSN6	Add to inlet or receptacle part number
-973	Three auxiliary pilot contacts	DS3, DS6, DSN6	Add to inlet or receptacle part number
-974	Four auxiliary pilot contacts	DS3, DS6, DSN6	Add to inlet or receptacle part number
-A06	Allows up to 4/0 AWG wiring capacity	DS2	Add to inlet part number
-A09	Suffix designating 225A capacity on appropriate DR device	DR225	Included in inlet & receptacle part number
-A155	Inlet without the standard lockout hole	DS, DSN	Add to inlet part number
-A188	Straight insertion	DS, DSN, DN, DR	Add to inlet and receptacle part number
-B	Bottom interior piece	All	
-CG	Cable guide for PRL or SRL release pawl for handle	DS, DSN, DN	Add to handle part number
-C-***	Suffixes for DS100C inlets & receptacles	DS	Included in inlet & receptacle part number
-E323	Allows up to 2/0 AWG wiring capacity	DS9, DR150	
-HP	High pressure water protection.	DS, DR, PN	Add to inlet and receptacle
-LP	Low pressure water protection.	DS, DR	Add to inlet and receptacle
-NC	Normally closed lid	DS, DSN, DR, DN	Add to receptacle part number
-NNF	Non Functioning Neutral - Activates 3 Pole 4 wire receptacle	DS, DSN, DR	
-NP	No paint on accessories	All accessories	
-R	Normally closed lid	DXN	Add to receptacle part number
-SS	Stainless steel	PN7, PN12, DS	
-T	Top interior piece	All	